




79.95 EUR
incl. 19% VAT, plus [shipping](#)

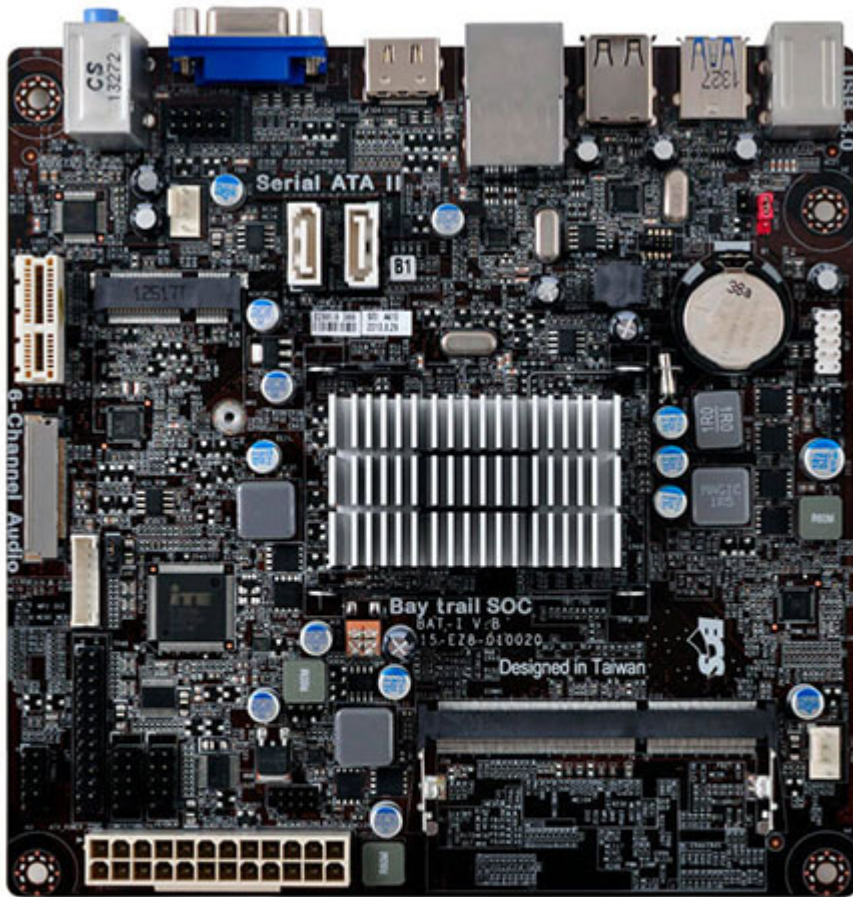

- Applied Solid Capacitor for CPU VRM to ensure a longer lifespan for system
- ECS Durathon Technology ensure the stability, reliability and performance of system.
- Dual Display design for multiple output support
- Integrated Printer (LPT) port / header to expand functionality
- Microsoft Windows 8 Certified
- Intel ® VRD 12 Ready
- Supports DirectX® 11 to enhance graphical performance
- Supports HDMI 1.4a Technology (resolution up to 1920X1200) and HDCP function
- Free Bundle: CyberLink Media Suite

Supports Intel® CNVi

Onboard Intel® Bay Trail
processors
On-Board CPU Intel ® Bay
Trail J1900 processor
VRD 12.0
Solid Capacitor for CPU
side
Supports Intel®
Hyper-Threading
Technology

CPU

GRAPHICS	Supports DirectX® 11
	Supports Full HD 1080P
	Blu-ray / HD-DVD
	Playback
	Single-channel DDR3
MEMORY	Memory architecture
	1 X DDR3 SO-DIMM
	socket
EXPANSION SLOT	Support up to 8 GB
	1 X PCI Express X 1 Gen 2.0slot(s)
	1 X Mini PCI Express X1 slot(s) for Wi-Fi /Bluetooth modules
Storage	2 X Serial ATAIII 3Gb/s
	6-Channel HD audio
Audio	CODEC Realtek ALC662
	Realtek ALC662 6-channel
	High Definition audio
	CODEC
	Meets performance
	requirements for Microsoft
	WLP 3.08 Vista premium
	and mobile PCs
	Six channel DAC supports
	16/20/24-bit PCM format
	for 5.1 channel audio
	solution
LAN	Emulation of 26 sound
	environments to enhance
	gaming experience
	Voice Cancellation and
USB	Key Shifting in Karaoke
	mode
	Compatible with Direct
	Sound 3D™, A3D™,
REAR PANEL I/O	I3DL2
	Realtek RTL8111G
	Gigabit Fast Ethernet
	Controller
REAR PANEL I/O	1 X USB3.1 Gen1 port(s) up to 5Gb/s
	6 X USB2.0 port(s) Up to 480 Mb/s (Back Panel 4 port(s), Onboard 2 port(s))
	1 X PS/2 Keyboard & PS/2
	mouse connectors
REAR PANEL I/O	1 X Audio port (Line
	Out/Line In/Mic In)
	1 X RJ-45 port
	1 X HDMI port(s)
REAR PANEL I/O	1 X D-Sub (VGA) port(s)
	1 X USB3.1 Gen1 port(s)
	4 X USB2.0 port(s)

	1 X 4-pin CPU_FAN connector with smart fan
	1 X 4-pin SYS_FAN connector with smart fan
	1 X Front Panel MIC/Speaker out header
	1 X Front Panel switch/LED header
CONNECTORS & HEADERS	1 X USB 2.0 header (Support additional 2 USB ports)
	2 X SATA II 3Gb/s connector(s)
	1 X CLR_CMOS header
	2 X Serial port header (COM)
	1 X Parallel port header (LPT)
	1 X LVDS connector (optional)
	AMI BIOS with 8 MB SPI Flash ROM
	Supports ACPI 5.0 & DMI
SYSTEM BIOS	Dual Display
	Plug and Play, STR (S3) / STD (S4) , Hardware
	monitor, Multi Boot
	Multi-Language BIOS
	Audio, LAN, can be disabled in BIOS
	Dual-Monitor function
FORM FACTOR	Mini ITX Form Factor
	170*170
OS Support	Windows 7 64-bit
	Windows 8.1 32-bit
	Windows 8.1 64-bit
	Windows 10 64-bit
	Windows 10 32-bit
Certifications	CE/FCC Certification
	ErP/EuP Certification
	WHQL Certification
	WHCK Certification